

PyLith Postseismic Deformation Example

2-D Subduction Zone

Brad Aagaard
Charles Williams
Matt Knepley

May 16, 2011


2-D Subduction Zone Example

Features illustrated in this example

- Generating a finite-element mesh using CUBIT
 - Nonplanar geometry
 - Variable mesh resolution
- Spatially variable coseismic slip
- Maxwell viscoelastic relaxation
- Files are located in `examples/2d/subduction` (v1.6.0 and later)


2-D Subduction Zone Example

Based on 2011 M9.0 Tohoku, Japan, earthquake

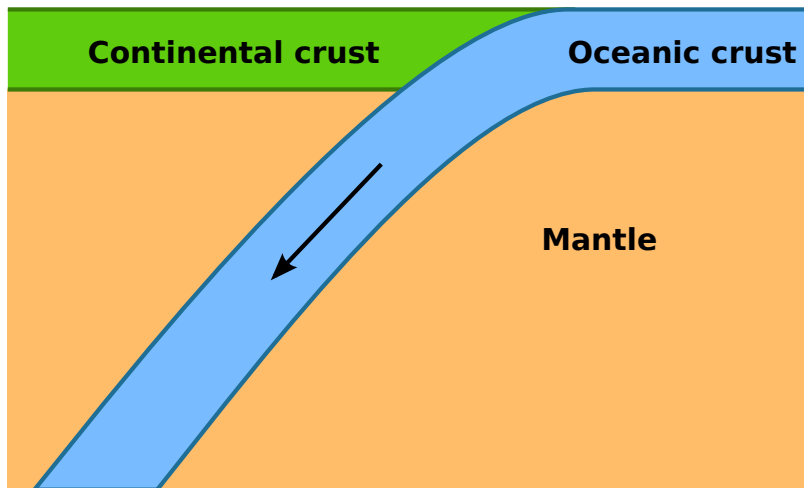


Steps in Subduction Zone Example


Step01: Coseismic slip

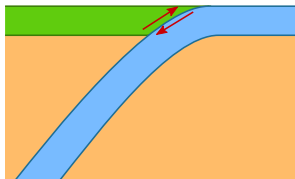

Step02: Interseismic deformation



Step03: Seismic cycle

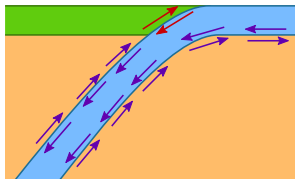

Parameters Common to All Steps

- Bulk constitutive models
 - **Crust** Linear elastic w/plane strain (ElasticPlaneStrain)
 - **Mantle** Linear Maxwell viscoelastic w/plane strain (MaxwellPlaneStrain)
- Faults w/prescribed slip
- Fixed boundaries (except subducting slab)


Mesh Generation via CUBIT

Include topography/bathymetry and slab geometry

- 1 Create geometry
 - 1 Create points
 - 2 Connect points into spline curves
 - 3 Split curves to form bounding curves
 - 4 Connect curves into surfaces
 - 5 Stitch surfaces together
- 2 Define meshing scheme and cell size variation
 - 1 Define cell size along curves near fault
 - 2 Increase cell size away from fault at geometric rate (bias)
- 3 Generate mesh
- 4 Create boundary conditions
- 5 Export mesh


Step01: Coseismic Slip

Prescribed slip based on Gavin Hayes's rupture model

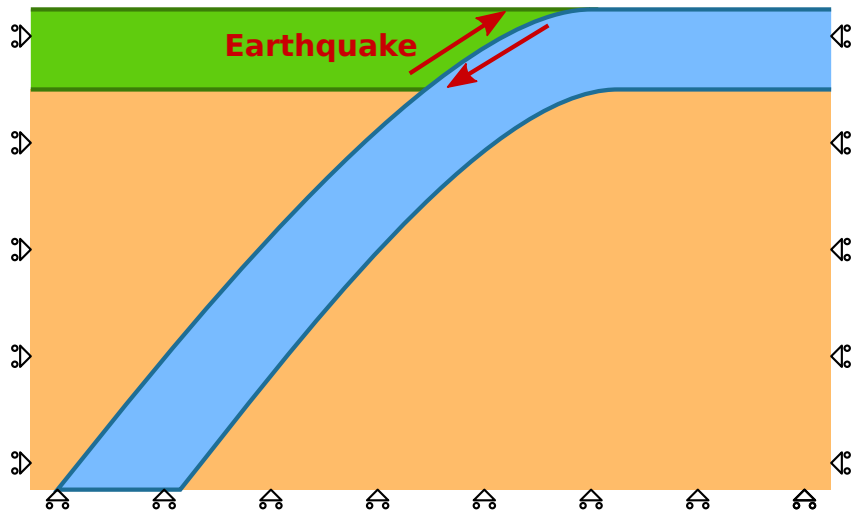


Step02: Interseismic Deformation

Aseismic creep along interface between slab and mantle

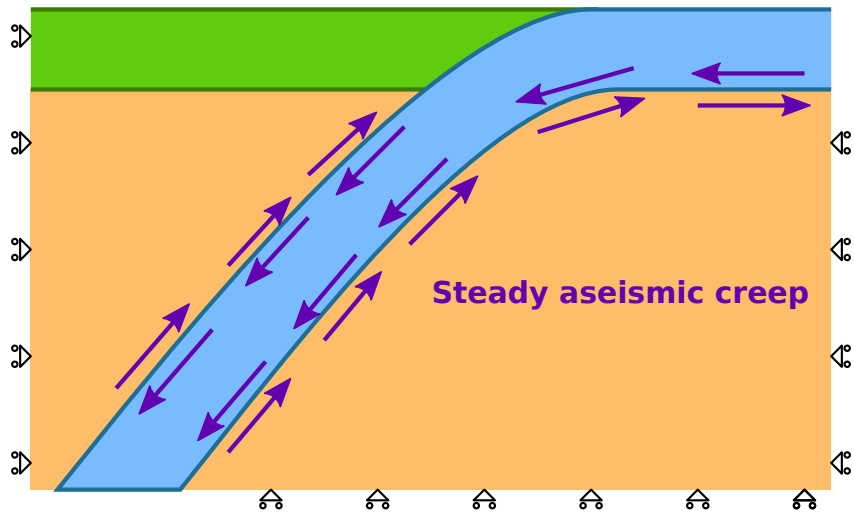

Step03: Seismic Cycle

300 years of interseismic deformation with coseismic slip

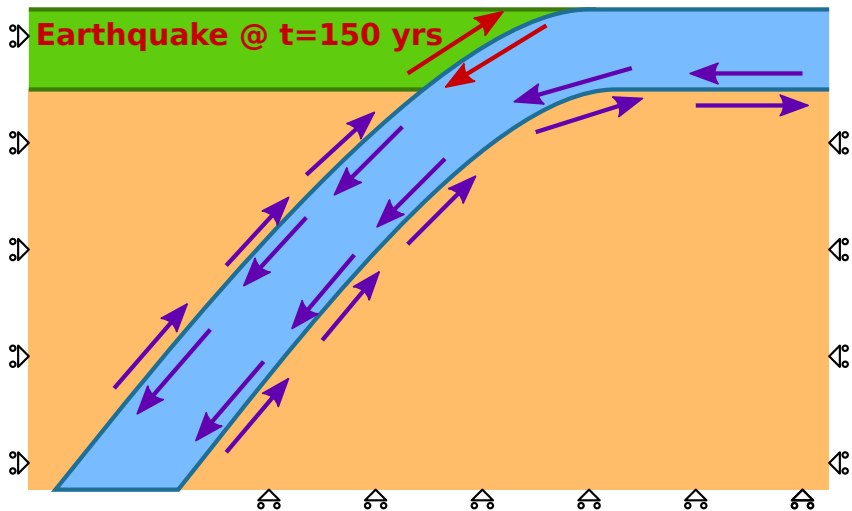

Suggested Modifications

Examples of how to work towards real research problems

- Change the resolution of mesh and its spatial variation
- Add depth dependent viscosity to the mantle and crust
- Modify the spatial database files for the material properties to use depth-dependent elastic properties based on PREM
- Mesh the geometry using quad4 cells rather than tri3 cells
- Add multiple, repeated earthquake ruptures and examine spinup towards a steady-state solution